

Special Features


- AC coupled Input & Output
- Limiter installed at the input. Protects Amplifier from moderated level ESD in case the amplifier is installed directly to the Antenna in EMC Applications
- The limiter allows amplifier to handle +20dBm CW.

Standard Features

- Unconditionally Stable at all temperatures
- Internally Regulated DC Voltage
- Field Replaceable 2.92mm K connectors
- Excellent Group Delay and Phase Linearity
- 0.009 inches diameter RF In/Out feed through
- 3 Year Warranty

Options

- Optimized Performance over Selected Bandwidth
- Improved Gain Flatness
- Lower Noise Figure
- Improved IN and OUT VSWR
- Gain and Phase matching
- Hermetically Sealed Package




****CAUTION:** Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Specifications (23 °C)

Parameter	Min	Typ	Max	Units
Frequency Range	0.1	-	40	GHz
Noise Figure*	-	5.0	5.5	dB
Gain	27	30	-	dB
Gain Flatness (+/-)	-	± 2.0	± 2.5	dB
P1 Output Power	+8	+10	-	dBm
Input VSWR	-	-	2.7:1	
Output VSWR	-	-	2.7:1	
Operating Temperature	-55	-	+85	°C
Non-Operating Temp Range	-65	-	+125	°C
RF Input Power (no-damage)	-	-	+20	dBm
Humidity (non-condensing)	-	-	95	%
Voltage	+12	+12	+15	VDC
Current	-	110		mA
Input Impedance	50			Ohms
RF Connector (IN/ OUT)	2.92mm - Female			
Dimensions	29.9 x 18.7 x 7.6			mm

* Noise Source used for measurement from 0.1GHz to 40 GHz is HP346C-K01 .
NF Uncertainty (approx. 0.3 dB), 0.2 dB due to ENR of HP 346C-K01; and 0.1 dB, due to the gain modulation of the unit, caused by the HP 346C-K01 source impedance change in the ON and OFF state. Noise Figures and other parameters degrade below 500 MHz.

Typical Data

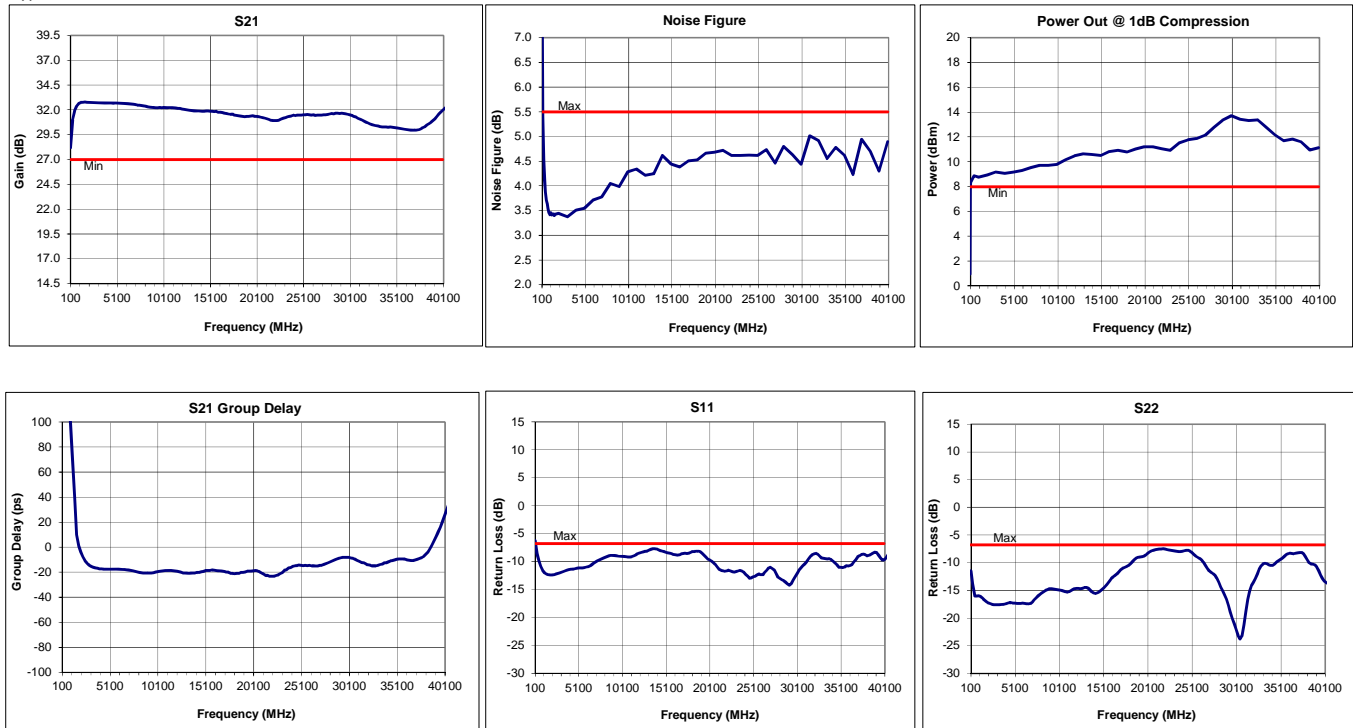



Approx. Actual Size



Mounting Drawing



Drop In

