

**Features**

- **Noise Figure: 4.5 dB (typ)**
- Unconditionally Stable at all temperatures
- Internally Regulated DC Voltage
- 50 Ohm Matched Input/Output
- Field Replaceable 2.92mm K connectors
- Excellent Group Delay and Phase Linearity
- 0.009 inches diameter RF In/Out feed through
- Operating Temp. -40 C to +85 C
- 3 Year Warranty

**Options**

- **Optimized Performance over Selected Bandwidth**
- Internally DC Block Input (Output DC Block Standard)
- Hermetically Sealed Package
- Improved Gain Flatness
- Improved IN and OUT VSWR
- Gain and Phase matching
- Lower Noise Figure




**Specifications (23 °C)**

Parameter	Min	Typ	Max	Units
Frequency Range	0.1	-	40	GHz
Noise Figure*	-	4.5	5.5	dB
Gain	27	33	-	dB
Gain Flatness (+/-)	-	± 1.7	± 2.5	dB
P1 Output Power	+8	+10	-	dBm
Input VSWR	-	2.5:1	2.7:1	
Output VSWR	-	2.5:1	2.7:1	
Operating Temperature	-40	-	+85	°C
Non-Operating Temp Range	-65	-	+85	°C
RF Input Power (no-damage)	-	-	+13	dBm
Humidity (non-condensing)	-	-	95	%
Voltage	+12	+12	+15	VDC
Current	-	145		mA
Input Impedance	50			Ohms
RF Connector	2.92mm - Female			
Dimensions	29.9 x 18.7 x 7.6			mm

\* Noise Source used for measurement from 0.1 to 18 GHz is HP 346A, and from 18-40GHz is HP346C-K01. NF Uncertainty (approx. 0.3 dB). 0.2 dB due to ENR of HP 346C-K01, and 0.1 dB due to the gain modulation of the unit caused by the HP 346C-K01 source impedance change in the ON and OFF state. Noise Figure and other parameters degrade below 500 Mhz.

**Typical Data**

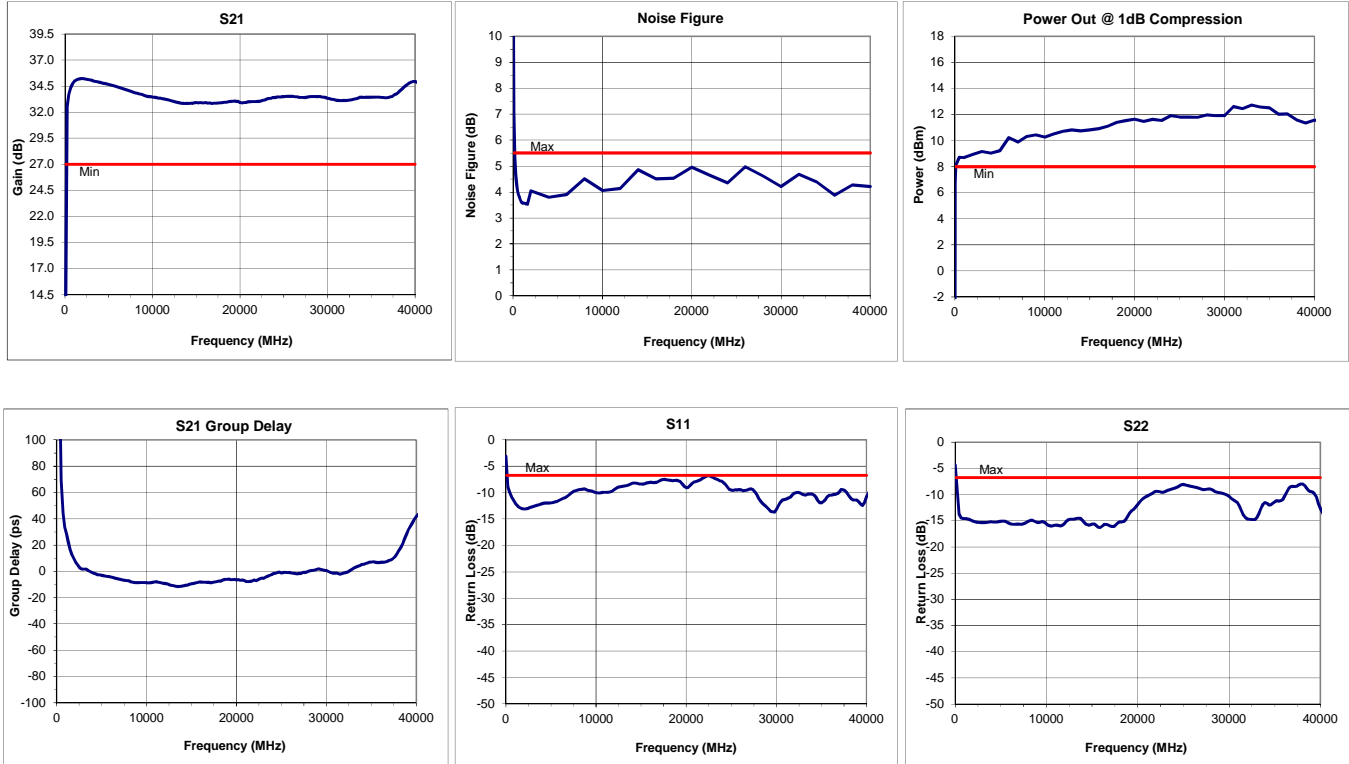




Approx. Actual Size



**Mounting Drawing**



**Drop In**

