

**Features**

- **Noise Figure  $\leq 4.8$  dB**
- Unconditionally Stable at all temperatures
- Internally Regulated DC Voltage
- 50 Ohm Matched Input/Output
- Field Replaceable 2.92mm K connectors
- Excellent Group Delay and Phase Linearity
- 0.009 inches diameter RF In/Out feed through
- Operating Temp. -55 C to +85 C
- 3 Year Warranty

**Options**

- **Optimized Performance over Selected Bandwidth**
- Internally DC Block Input (Output DC Block Standard)
- Hermetically Sealed Package
- Improved Gain Flatness
- Improved IN and OUT VSWR
- Gain and Phase matching
- Lower Noise Figure




**Specifications (23 °C)**

Parameter	Min	Typ	Max	Units
Frequency Range	0.5	-	30	GHz
Noise Figure*	-	4.6	4.8	dB
Gain	26	30	-	dB
Gain Flatness (+/-)	-	$\pm 1.5$	$\pm 1.8$	dB
P1 Output Power	+13	+14	-	dBm
Input VSWR	-	-	2.5:1	
Output VSWR	-	-	2.5:1	
Operating Temperature	-55	-	+85	°C
Non-Operating Temp Range	-65	-	+85	°C
RF Input Power (no-damage)	-	-	+13	dBm
Humidity (non-condensing)	-	-	95	%
Voltage	+15	+15	+15	VDC
Current	-	180		mA
Input Impedance	50			Ohms
RF Connector	2.92mm - Female			
Dimensions	29.9 x 18.7 x 7.6			mm

\* Noise Source used for measurement from 500MHz to 42 GHz is HP346C-K01.  
NF Uncertainty (approx. 0.3 dB), 0.2 dB due to ENR of HP 346C-K01; and 0.1 dB, due to the gain modulation of the unit, caused by the HP 346C-K01 source impedance change in the ON and OFF state.  
Noise Figures and other parameters degrade below 500 MHz.

**Typical Data**

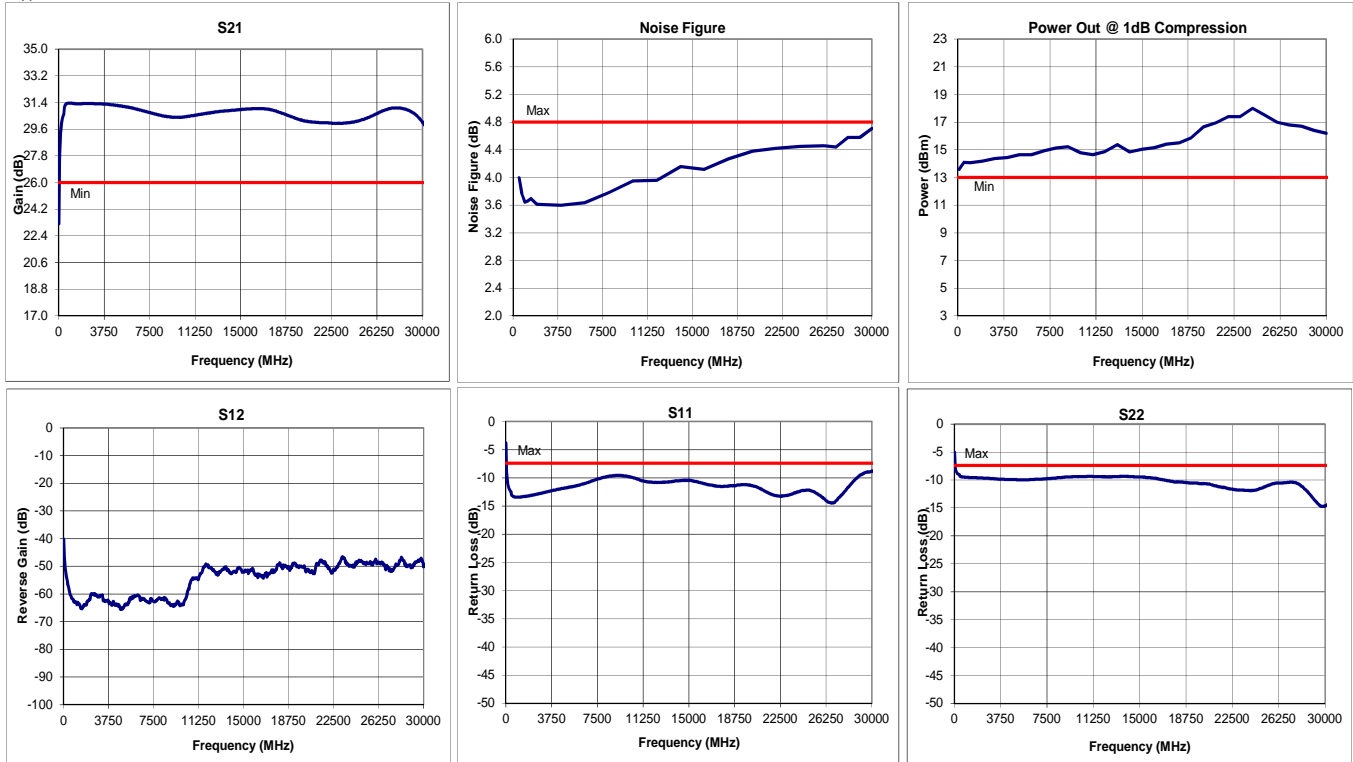



Approx. Actual Size



**Mounting Drawing**



**Drop In**

