

Features

- Noise Figure ≤ 12 dB
- Unconditionally Stable at all temperatures
- Internally Regulated DC Voltage
- 50 Ohm Matched Input/Output
- Field Replaceable 1.85mm V connectors
- Excellent Group Delay and Phase Linearity
- 0.009 inches diameter RF In/Out feed through
- Operating Temp. -55 C to +85 C
- 3 Year Warranty

Options

- Optimized Performance over Selected Bandwidth
- Internally DC Block Input (Output DC Block Standard)
- Hermetically Sealed Package
- Improved Gain Flatness
- Improved IN and OUT VSWR
- Gain and Phase matching
- Lower Noise Figure




Specifications (23 °C)

Parameter	Min	Typ	Max	Units
Frequency Range	2	-	50	GHz
Noise Figure*	-	-	12	dB
Gain	10	-	-	dB
Gain Flatness (+/-)	-	-	± 2.5	dB
P1 Output Power	+5	-	-	dBm
Input VSWR	-	-	2.8:1	
Output VSWR	-	-	2.8:1	
Operating Temperature	-55	-	+85	°C
Non-Operating Temp Range	-65	-	+125	°C
RF Input Power (no-damage)	-	-	+13	dBm
Humidity (non-condensing)	-	-	95	%
Voltage	+12	+12	+15	VDC
Current	-	205		mA
Input Impedance	50			Ohms
RF Connector	1.85mm - Female			
Dimensions	29.9 x 18.7 x 7.6			mm

* Noise Source used for measurement from 2GHz to 50 GHz is HP346C-K01 .
NF Uncertainty (approx. 0.3 dB) . 0.2 dB due to ENR of HP 346C-K01, and 0.1 dB due to the gain modulation of the unit caused by the HP 346C-K01 source impedance change in the ON and OFF state.

Typical Data

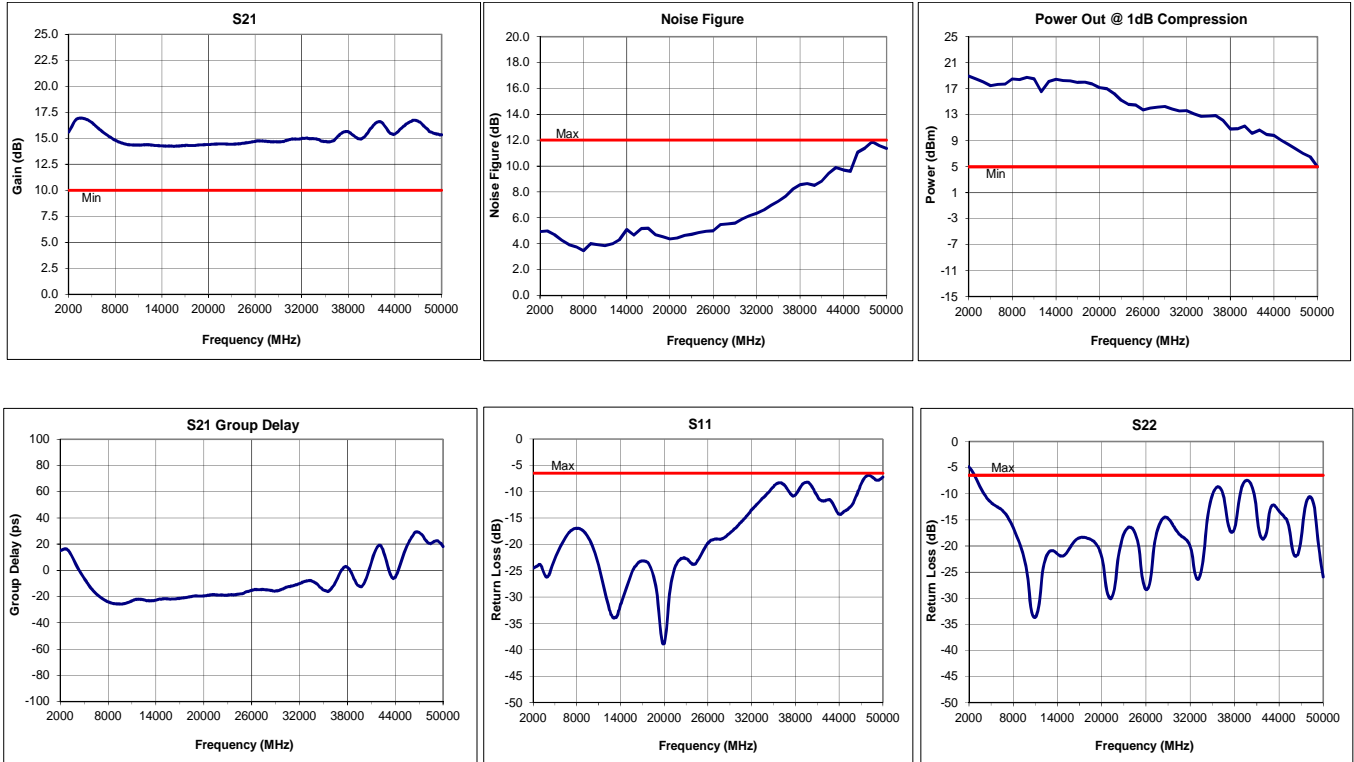



Approx. Actual Size




Mounting Drawing



Drop In




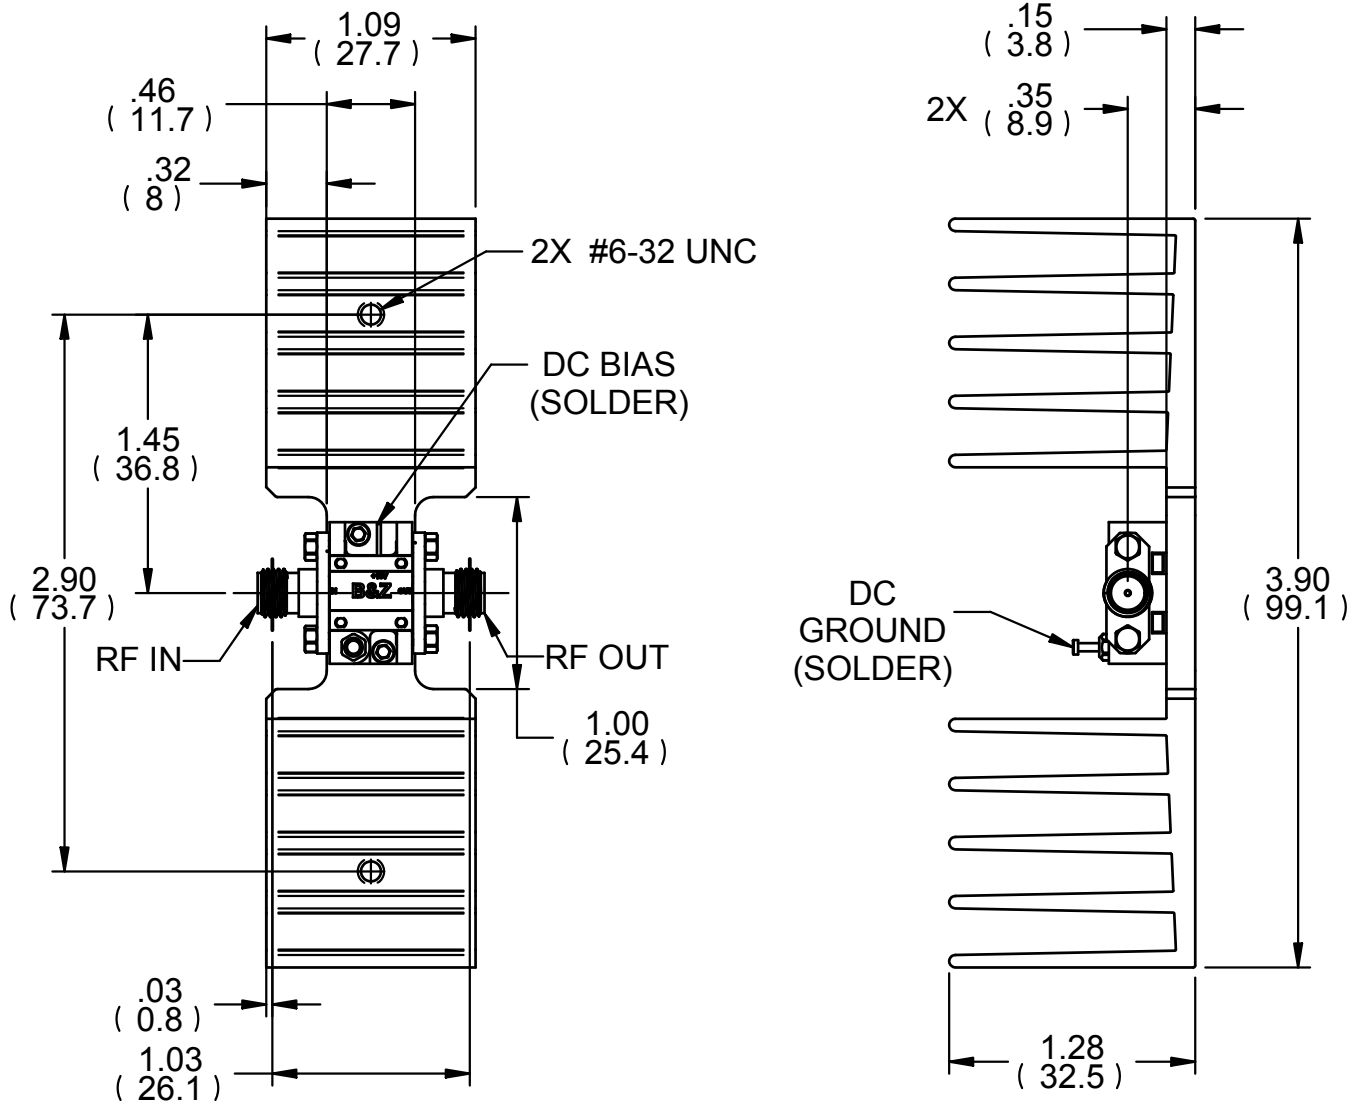

THE AMPLIFIER IS REMOVABLE FROM THE HEATSINK

NOTES:

1. HEATSINK SURFACE AREA 35.14 SQ. INCHES
2. HEATSINK MATERIAL: ALUMINUM ALLOY
3. APPROXIMATE TEMPERATURE RISE IS 6.5°C/W IN STILL AIR.

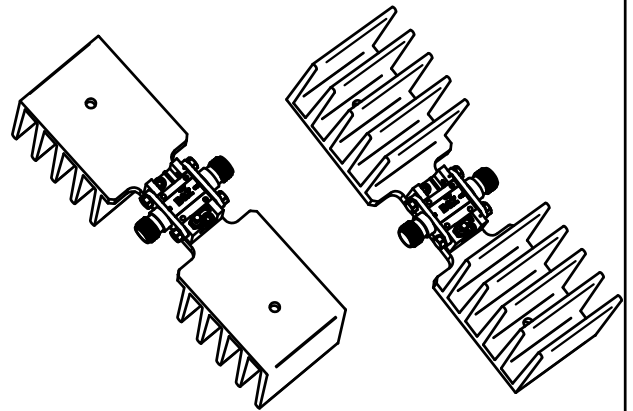

	SIZE A	OUTLINE, STD. AMPLIFIER ON HEATSINK	100169
	SCALE	REF. FILE NAME: 100169_A Outline, Std Amplifier on Heatsink	SHEET 1 OF 1